
BRP-ROTAX CHASSIS APPROVAL FORM



| Manufacturer | EKS |
|-------------------------------|--|
| Chassis model | PREDATOR /DD2 |
| Category | ROTAX MAX Challenge, 125 MAX DD2 class |
| Validity of approval | without limitation |
| Date of approval by BRP-ROTAX | 2007 01 17 |

| Technical definiton of the frame | |
|---|--|
| Built according to CIK regualtions for short circuits karts | |

| Technical definition of the components of the chassis | | | |
|---|---|--|--|
| Brake system: | Designed according to CIK rules for shifter classes. | | |
| | A brake system with a valid CIK Homologation must be used. | | |
| Bodywork: | Designed according to CIK rules for short circuit karts. | | |
| | A bodywork with a valid CIK Homologation must be used. | | |
| Rear Tire Protection System: | m: For the participation at national or internatioinal ROTAX MAX | | |
| | Challenge race, the ROTAX Rear Tire Protection System must be used. | | |

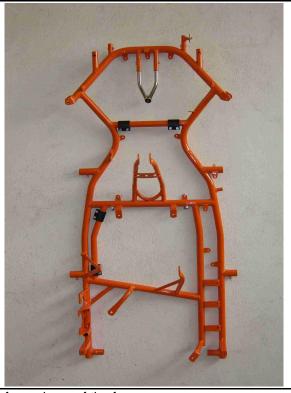



| Photo from above of the frame | Photo of the identification plate of the frame with the |
|-------------------------------|---|
| (without any monted part) | name of the chassis model. |

| Technical description | Dimensions | Tolerance |
|---|------------|------------|
| Outer diameter of the main tubes (without painting) | 30/32 mm | +/- 0,5 mm |
| Rear width of main tubes (center line to center line) | 610 mm | +/- 5,0 mm |
| Distance of the rear two main tubes on the right side (center | 92 mm | +/- 0,5 mm |
| line to center line) | | |
| Wheelbase | 1040 mm | +/- 5.0 mm |

| Technical description | Figure |
|--|--------|
| Number of adjustable/removeable stabilizers at the frame | 3 |

BRP-ROTAX CHASSIS APPROVAL FORM



Photo from above of the frame with the section of the engine mount




Photo from above of the frame with the section of the two supports for the exhaust system



Photo of the frame with the section of the support for the fuel pump (fuel pump mounted)



Photo of the frame from the side with the section of the supports for the radiator (radiator mounted)

BRP-ROTAX CHASSIS APPROVAL FORM



Photo from the steering column with the section with the knurling for the steering wheel hub (knurling according to DIN 82 - RAA1).



Photo from above of the frame with the section of the two supports for the RTPS (Rear Tire Protection System)



Photo of the frame from the side with the section of the support for the RTPS (Rear Tire Protection System)



Photo of the frame from the back with the section of the support for the RTPS (Rear Tire Protection System)