

Manufacturer	PAROLIN RACING KART SRL
Chassis model	Invader DD2
Category	ROTAX MAX Challenge, 125 MAX DD2 class
Validity of approval	without limitation
Date of approval by BRP-ROTAX	2007 09 18

Technical definiton of the frame

Built according to CIK regualtions for short circuits karts


Technical definition of the components of the chassis		
Brake system:	Designed according to CIK rules for shifter classes.	
	A brake system with a valid CIK Homologation must be used.	
Bodywork:	Designed according to CIK rules for short circuit karts.	
	A bodywork with a valid CIK Homologation must be used.	
Rear Tire Protection System:	For the participation at national or internatioinal ROTAX MAX	
	Challenge race, the ROTAX Rear Tire Protection System must be used.	

PAROLIN CHINA DIVISION BERGHATAA INWADER N:
Photo of the identification plate of the frame with the name of the chassis model.

Technical description	Dimensions	Tolerance
Outer diameter of the main tubes (without painting)	mm 32	+/- 0,5 mm
Rear width of main tubes (center line to center line)	mm 638	+/- 5,0 mm
Distance of the rear two main tubes on the right side	mm 92	+/- 0,5 mm
(center line to center line)		
Wheelbase	mm 1046	+/- 5,0 mm

Technical description	Figure
Number of adjustable/removeable stabilizers at the frame	2

BRP-ROTAX CHASSIS APPROVAL FORM

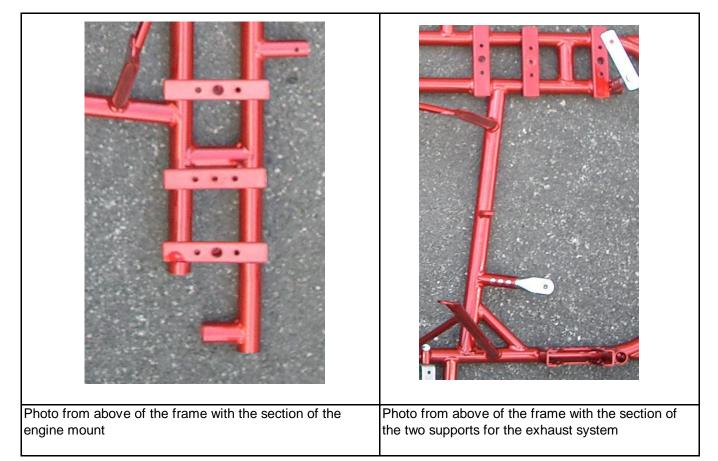



BRP-ROTAX CHASSIS APPROVAL FORM

